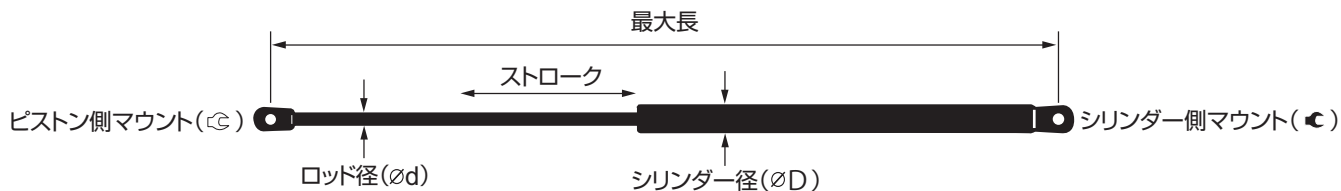



MAXLIFT スペック表 [品番別]



MONROE	φd	φD	最大長	ストローク	反発力	㊤	㊤
ML5016	8	19	549	229.5	240	Y1	X2
ML5038	8	19	500	200	280	U	U
ML5039	8	19	550	229.5	380	Y1	X2
ML5073	8	19	501	207	480	Y1	X1
ML5077	8	19	591	240	350	U	U
ML5079	8	19	445	180	300	U	U
ML5100	8	19	500	204	480	S1	S1
ML5101	8	19	502	199	280	S1	S1
ML5102	8	19	788	342	280	Y1	V
ML5103	8	19	510	202	620	U	U
ML5120	8	19	475	195	350	U	U
ML5123	8	19	515	210	500	S1	S1
ML5128	10	22	690	280	630	S1	S1
ML5132	8	19	502	205	500	S1	U
ML5135	8	19	279	95	490	U	U
ML5138	8	19	566	204	500	U	U
ML5144	8	19	565	216	360	U	U
ML5145	8	19	431	173	380	U	U
ML5148	8	19	600	230	300/360	U	U
ML5160	8	19	458	176	430	S1	S1
ML5163	8	19	350	100	320	S1	S1
ML5164	8	19	472	180	330	U	U
ML5165	8	19	455	164	380	U	U
ML5166	8	19	536.5	205	430	U	U
ML5167	8	19	535	215	480	U	U
ML5170	8	19	295	80	480	U	U
ML5180	8	19	490	190	190/250	U	U
ML5183	8	19	445	172	220/250	U	U
ML5184	8	19	602	223	320	U	U
ML5185	8	19	500	205	470	S1	U
ML5188	8	19	540	214	400	U	U
ML5192	8	19	680	270	360	U	U
ML5193	8	19	279	90	530	U	U
ML5194	8	19	500	200	380	S1	U
ML5196	8	19	500	200	400	S1	U
ML5197	8	19	500	205	420	S1	U
ML5198	8	19	500	193	470	S1	U
ML5213	8	19	540	200	450	S1	S1
ML5223	10	22	298	95	650	U	U
ML5224	10	22	465	140	655	U	U
ML5227	8	19	502	200	530	S1	S1
ML5234	10	22	278	90	630	U	U
ML5238	8	19	500	190	635	S1	P
ML5241	8	19	412	155	340	U	U
ML5260	8	19	293	80	610	U	U

MONROE	φd	φD	最大長	ストローク	反発力	㊤	㊤
ML5261	8	19	500	200	350	S1	U
ML5263	8	19	319	110	580	S1	S1
ML5264	8	19	500	200	350	S1	U
ML5265	8	19	585	235	250	U	U
ML5266	8	19	722	306	280	U	U
ML5267	8	19	648	265	190	S1	S1
ML5269	8	19	715	306	290	U	U
ML5272	8	19	522	210	400	U	U
ML5277	8	19	405	150	520	U	U
ML5307	8	19	485	189	450	U	U
ML5308	8	21	450	170	490	U	U
ML5309	8	19	675	285	260	U	U
ML5312	8	19	545	230	300	U	U
ML5319	8	19	558	200	490/550	U	U
ML5325	8	19	600	244	330	U	U
ML5329	10	22	772	322	630	U	U
ML5335	8	19	310	110	580	S1	S1
ML5336	10	22	333	100	700	S1	S1
ML5340	8	19	525	210	140	U	U
ML5343	8	19	448	180	590	U	U
ML5345	8	19	650	270	310	U	U
ML5346	8	19	571	208	570	U	U
ML5349	8	19	525	210	480	U	U
ML5350	8	19	525	210	240	U	U
ML5357	8	19	538	190	125	U	U
ML5375	8	19	568	230	500	U	U
ML5377	8	19	507	203	520	U	S1
ML5386	8	19	722	315	325	U	U
ML5389	8	19	215	48	200	S1	S1
ML5393	8	19	678	270	270	U	U
ML5397	8	19	568	230	560	U	U
ML5400	8	19	570	230	420	U	U
ML5401	8	19	570	230	520	U	U
ML5402	8	19	570	240	470	U	U
ML5406	8	19	498	197	330	U	U
ML5408	8	19	511	199	520	U	U
ML5411	8	19	315	105	370	S1	U
ML5412	8	19	565	210	560	S1	U
ML5415	10	22	455	127	700	U	U
ML5416	8	19	481.5	199	530	U	U
ML5421	6	15	367	145	320	Y1	X1
ML5422	6	15	410	160	280	Y1	X1
ML5425	8	19	491	205	600	U	U
ML5432	8	19	624	260	400	S1	S1
ML5436	8	19	517	190	420	S1	S1

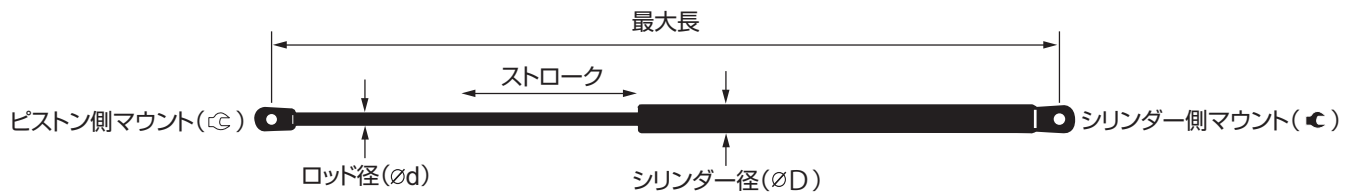
MAXLIFT スペック表 [品番別]



MONROE	φd	φD	最大長	ストローク	反発力	㊦	㊧
ML5438	8	19	459.5	180	535	S1	S1
ML5439	8	19	279	95	520	U	U
ML5441	10	22	326	115	800	S1	S1
ML5442	8	19	348	120	620	U	U
ML5445	8	19	365	140	480	Y1	D
ML5449	8	19	405	160	620	U	U
ML5450	8	19	635	259	290	U	U
ML5459	8	19	485	193	460	S1	S1
ML5460	8	19	494	185	490	S1	S1
ML5468	8	19	512	200	470	S1	S1
ML5469	8	19	581.5	210	535	S1	S1
ML5470	8	19	685	265	200	S1	S1
ML5471	8	19	286	100	310	S1	S1
ML5481	8	19	270	75	420	S1	S1
ML5489	8	19	364	132	310	S1	S1
ML5491	8	19	500	200	310	S1	U
ML5510	10	22	483	175	740	U	U
ML5512	10	22	480	173	690	U	U
ML5517	10	22	195	55	1100	U	U
ML5521	8	19	675	263	360	T1	Q
ML5522	8	19	242	84	380	Y6	D
ML5529	14	28	270	70	1600	O	M
ML5530	8	19	640	260	510	U	P
ML5531	8	19	280	90	500	S1	T1
ML5532	8	19	280	90	600	S1	T1
ML5535	8	19	241	70	560	Y1	T1
ML5543	8	19	695	272	640	U	U
ML5558	8	19	280	90	550	U	T1
ML5559	10	22	235	52	850	U	S2
ML5560	8	19	535	200	280	U	U
ML5561	8	19	687	295	270	U	U
ML5562	8	19	313	112	330	S1	S1
ML5563	8	19	374	140	350	S1	S1
ML5564	8	19	577	225	270	U	P
ML5565	8	19	715	303	160	P	S1
ML5574	8	19	500	200	270	U	D
ML5577	8	19	570	200	280	U	P
ML5591	10	22	545	195	750	U	Q
ML5594	8	19	255	86	600	Y5	X3
ML5595	8	19	255	86	370	Y5	X3
ML5596	6	15	254	95	350	Y4	X1
ML5600	8	19	500	200	230	Y1	D
ML5608	8	19	675	279	210	N	N
ML5620	8	19	580	205	230	U	U
ML5621	10	22	775	322	530	U	U


MONROE	φd	φD	最大長	ストローク	反発力	㊦	㊧
ML5636	8	19	525	210	240	U	U
ML5637	14	28	396	108	1550	O	O
ML5638	8	19	765	324	200	U	U
ML5640	6	15	305	109	130	T1	T1
ML5643	6	15	244	90	400	S1	S1
ML5646	8	19	319	100	370	Y5	X3
ML5648	8	18.5	728	310	265	P	U
ML5649	8	19	405	160	300	U	U
ML5653	8	18.5	439.5	157	550	S1	U
ML5655	8	18.5	456	165	320	S1	S1
ML5658	8	18.5	369	110	320	S1	S1
ML5659	8	18.5	553	225	220	S1	S1
ML5663	8	18.5	283	101.5	450	U	U
ML5670	8	19	366	117	280	S1	S1
ML5673	8	19	582	203	460	U	U
ML5674	14	28	325	100	1400	S1	S1
ML5675	10	22	175	45	700	U	U
ML5678	10	22	943	417	380	U	L
ML5679	8	19	722	306	310	L	L
ML5680	8	19	365.5	130	440	U	U
ML5685	14	28	320	85	1200	M	O
ML5688	8	19	288	104	640	S1	S1
ML5689	8	19	400	160	330	S1	P
ML5690	8	19	530	175	530	S1	S1
ML5691	8	19	412	163	400	S1	U
ML5692	8	19	545	210	450	U	U
ML5693	8	19	625	210	590	P	S1
ML5694	8	19	370	110	320	S1	S1
ML5695	8	19	425	165	350	S1	U
ML5703	8	19	480	190	420	P	U
ML5715	8	19	650	270	350	U	U
ML5716	10	22	667	255	755	U	U
ML5717	8	19	497	200	430	P	U
ML5718	10	22	547	220	460	U	U
ML5719	8	19	475	175	510	U	P
ML5722	10	22	505	205	610	U	U
ML5725	8	19	451	185	385	S1	S1
ML5727	8	19	320	105	470	U	U
ML5728	8	19	375	145	615	U	U
ML5729	8	19	310	110	400	U	U
ML5730	8	19	565	215	315	U	U
ML5731	8	19	505	211	330	S1	P
ML5735	8	19	730	320	250	P	U
ML5736	8	19	404.5	163	460	S1	U
ML5737	8	19	720	300	180	P	U

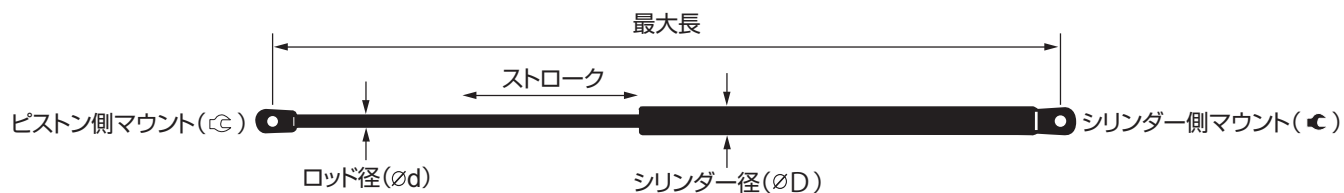MAXLIFT スペック表 [品番別]



MONROE	Ø d	Ø D	最大長	ストローク	反発力	☛	☞
ML5742	8	19	450	180	535	S1	U
ML5743	10	22	505	170	770	U	P
ML5744	10	22	298	80	730	U	U
ML5745	10	22	298	80	700	U	U
ML5746	8	19	475	184	650	U	P
ML5747	8	19	490	198	530	T1	T1
ML5748	8	19	255	85	600	S1	U
ML5751	10	22	300	70	710	T1	T1
ML5754	8	19	528	212	420	U	P
ML5769	10	22	285	100	720	U	S1
ML5773	8	19	475	195	640	U	U
ML5775	8	19	437	173	350	S1	S1
ML5785	8	19	460	170	350	S1	S1
ML5791	8	19	201	52	250	S1	U
ML5792	8	19	480	200	550	U	P
ML5793	8	19	315	100	550	S1	S1
ML5798	8	19	674	293	300	U	U
ML5799	8	19	674	293	330	U	U
ML5800	8	19	333	117	650	U	U
ML5801	8	19	415	160	530	U	U
ML5802	8	19	418	163	490	U	U
ML5804	8	19	314.5	116	330	U	U
ML5806	10	22	560	178	725	U	P
ML5808	8	19	256	58	560	S1	S1
ML5811	8	19	323	103	700	U	U
ML5813	6	15	297	113	240	S1	S1
ML5818	8	19	282	98	560	U	U
ML5829	8	19	730	310	380	P	U
ML5830	8	19	375	140	390	U	P
ML5831	8	19	450	180	550	U	S1
ML5849	8	18.5	526	220	325	U	U
ML5851	8	18.5	631	265	455	S1	S1
ML5852	10	22	399	86	1430	G	G

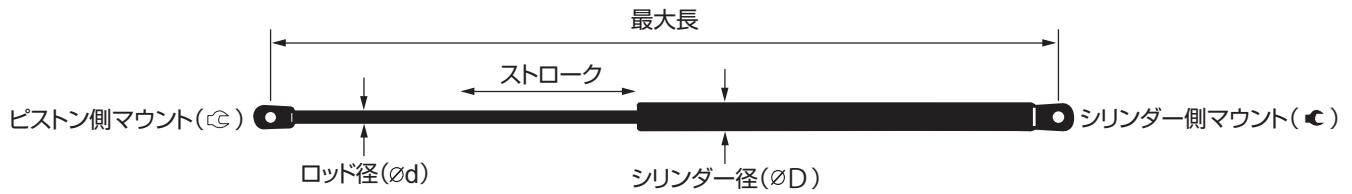
MAXLIFT スペック表【反発力別】



反発力	MONROE	φd	φD	最大長	ストローク	㊦	㊦
125	ML5357	8	19	538	190	U	U
130	ML5640	6	15	305	109	T1	T1
140	ML5340	8	19	525	210	U	U
160	ML5565	8	19	715	303	P	S1
180	ML5737	8	19	720	300	P	U
190	ML5267	8	19	648	265	S1	S1
200	ML5389	8	19	215	48	S1	S1
200	ML5470	8	19	685	265	S1	S1
200	ML5638	8	19	765	324	U	U
210	ML5608	8	19	675	279	N	N
220	ML5659	8	18.5	553	225	S1	S1
230	ML5600	8	19	500	200	Y1	D
230	ML5620	8	19	580	205	U	U
240	ML5016	8	19	549	229.5	Y1	X2
240	ML5350	8	19	525	210	U	U
240	ML5636	8	19	525	210	U	U
240	ML5813	6	15	297	113	S1	S1
250	ML5265	8	19	585	235	U	U
250	ML5735	8	19	730	320	P	U
250	ML5791	8	19	201	52	S1	U
260	ML5309	8	19	675	285	U	U
265	ML5648	8	18.5	728	310	P	U
270	ML5393	8	19	678	270	U	U
270	ML5561	8	19	687	295	U	U
270	ML5564	8	19	577	225	U	P
270	ML5574	8	19	500	200	U	D
280	ML5038	8	19	500	200	U	U
280	ML5101	8	19	502	199	S1	S1
280	ML5102	8	19	788	342	Y1	V
280	ML5266	8	19	722	306	U	U
280	ML5422	6	15	410	160	Y1	X1
280	ML5560	8	19	535	200	U	U
280	ML5577	8	19	570	200	U	P
280	ML5670	8	19	366	117	S1	S1
290	ML5269	8	19	715	306	U	U
290	ML5450	8	19	635	259	U	U
300	ML5079	8	19	445	180	U	U
300	ML5312	8	19	545	230	U	U
300	ML5649	8	19	405	160	U	U
300	ML5798	8	19	674	293	U	U
310	ML5345	8	19	650	270	U	U
310	ML5471	8	19	286	100	S1	S1
310	ML5489	8	19	364	132	S1	S1
310	ML5491	8	19	500	200	S1	U
310	ML5679	8	19	722	306	L	L

反発力	MONROE	φd	φD	最大長	ストローク	㊦	㊦
315	ML5730	8	19	565	215	U	U
320	ML5163	8	19	350	100	S1	S1
320	ML5184	8	19	602	223	U	U
320	ML5421	6	15	367	145	Y1	X1
320	ML5655	8	18.5	456	165	S1	S1
320	ML5658	8	18.5	369	110	S1	S1
320	ML5694	8	19	370	110	S1	S1
325	ML5386	8	19	722	315	U	U
325	ML5849	8	18.5	526	220	U	U
330	ML5164	8	19	472	180	U	U
330	ML5325	8	19	600	244	U	U
330	ML5406	8	19	498	197	U	U
330	ML5562	8	19	313	112	S1	S1
330	ML5689	8	19	400	160	S1	P
330	ML5731	8	19	505	211	S1	P
330	ML5799	8	19	674	293	U	U
330	ML5804	8	19	314.5	116	U	U
340	ML5241	8	19	412	155	U	U
350	ML5077	8	19	591	240	U	U
350	ML5120	8	19	475	195	U	U
350	ML5261	8	19	500	200	S1	U
350	ML5264	8	19	500	200	S1	U
350	ML5563	8	19	374	140	S1	S1
350	ML5596	6	15	254	95	Y4	X1
350	ML5695	8	19	425	165	S1	U
350	ML5715	8	19	650	270	U	U
350	ML5775	8	19	437	173	S1	S1
350	ML5785	8	19	460	170	S1	S1
360	ML5144	8	19	565	216	U	U
360	ML5192	8	19	680	270	U	U
360	ML5521	8	19	675	263	T1	Q
370	ML5411	8	19	315	105	S1	U
370	ML5595	8	19	255	86	Y5	X3
370	ML5646	8	19	319	100	Y5	X3
380	ML5039	8	19	550	229.5	Y1	X2
380	ML5145	8	19	431	173	U	U
380	ML5165	8	19	455	164	U	U
380	ML5194	8	19	500	200	S1	U
380	ML5522	8	19	242	84	Y6	D
380	ML5678	10	22	943	417	U	L
380	ML5829	8	19	730	310	P	U
385	ML5725	8	19	451	185	S1	S1
390	ML5830	8	19	375	140	U	P
400	ML5188	8	19	540	214	U	U
400	ML5196	8	19	500	200	S1	U

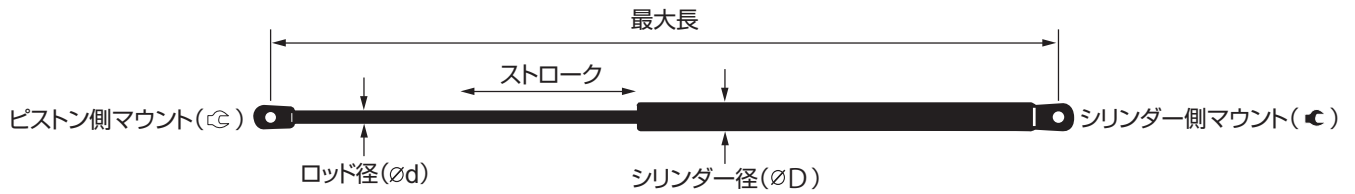
MAXLIFT スペック表 [反発力別]



反発力	MONROE	φd	φD	最大長	ストローク	☾	☉
400	ML5272	8	19	522	210	U	U
400	ML5432	8	19	624	260	S1	S1
400	ML5643	6	15	244	90	S1	S1
400	ML5691	8	19	412	163	S1	U
400	ML5729	8	19	310	110	U	U
420	ML5197	8	19	500	205	S1	U
420	ML5400	8	19	570	230	U	U
420	ML5436	8	19	517	190	S1	S1
420	ML5481	8	19	270	75	S1	S1
420	ML5703	8	19	480	190	P	U
420	ML5754	8	19	528	212	U	P
430	ML5160	8	19	458	176	S1	S1
430	ML5166	8	19	536.5	205	U	U
430	ML5717	8	19	497	200	P	U
440	ML5680	8	19	365.5	130	U	U
450	ML5213	8	19	540	200	S1	S1
450	ML5307	8	19	485	189	U	U
450	ML5663	8	18.5	283	101.5	U	U
450	ML5692	8	19	545	210	U	U
455	ML5851	8	18.5	631	265	S1	S1
460	ML5459	8	19	485	193	S1	S1
460	ML5673	8	19	582	203	U	U
460	ML5718	10	22	547	220	U	U
460	ML5736	8	19	404.5	163	S1	U
470	ML5185	8	19	500	205	S1	U
470	ML5198	8	19	500	193	S1	U
470	ML5402	8	19	570	240	U	U
470	ML5468	8	19	512	200	S1	S1
470	ML5727	8	19	320	105	U	U
480	ML5073	8	19	501	207	Y1	X1
480	ML5100	8	19	500	204	S1	S1
480	ML5167	8	19	535	215	U	U
480	ML5170	8	19	295	80	U	U
480	ML5349	8	19	525	210	U	U
480	ML5445	8	19	365	140	Y1	D
490	ML5135	8	19	279	95	U	U
490	ML5308	8	21	450	170	U	U
490	ML5460	8	19	494	185	S1	S1
490	ML5802	8	19	418	163	U	U
500	ML5123	8	19	515	210	S1	S1
500	ML5132	8	19	502	205	S1	U
500	ML5138	8	19	566	204	U	U
500	ML5375	8	19	568	230	U	U
500	ML5531	8	19	280	90	S1	T1
510	ML5530	8	19	640	260	U	P


反発力	MONROE	φd	φD	最大長	ストローク	☾	☉
510	ML5719	8	19	475	175	U	P
520	ML5277	8	19	405	150	U	U
520	ML5377	8	19	507	203	U	S1
520	ML5401	8	19	570	230	U	U
520	ML5408	8	19	511	199	U	U
520	ML5439	8	19	279	95	U	U
530	ML5193	8	19	279	90	U	U
530	ML5227	8	19	502	200	S1	S1
530	ML5416	8	19	481.5	199	U	U
530	ML5621	10	22	775	322	U	U
530	ML5690	8	19	530	175	S1	S1
530	ML5747	8	19	490	198	T1	T1
530	ML5801	8	19	415	160	U	U
535	ML5438	8	19	459.5	180	S1	S1
535	ML5469	8	19	581.5	210	S1	S1
535	ML5742	8	19	450	180	S1	U
550	ML5558	8	19	280	90	U	T1
550	ML5653	8	18.5	439.5	157	S1	U
550	ML5792	8	19	480	200	U	P
550	ML5793	8	19	315	100	S1	S1
550	ML5831	8	19	450	180	U	S1
560	ML5397	8	19	568	230	U	U
560	ML5412	8	19	565	210	S1	U
560	ML5535	8	19	241	70	Y1	T1
560	ML5808	8	19	256	58	S1	S1
560	ML5818	8	19	282	98	U	U
570	ML5346	8	19	571	208	U	U
580	ML5263	8	19	319	110	S1	S1
580	ML5335	8	19	310	110	S1	S1
590	ML5343	8	19	448	180	U	U
590	ML5693	8	19	625	210	P	S1
600	ML5425	8	19	491	205	U	U
600	ML5532	8	19	280	90	S1	T1
600	ML5594	8	19	255	86	Y5	X3
600	ML5748	8	19	255	85	S1	U
610	ML5260	8	19	293	80	U	U
610	ML5722	10	22	505	205	U	U
615	ML5728	8	19	375	145	U	U
620	ML5103	8	19	510	202	U	U
620	ML5442	8	19	348	120	U	U
620	ML5449	8	19	405	160	U	U
630	ML5128	10	22	690	280	S1	S1
630	ML5234	10	22	278	90	U	U
630	ML5329	10	22	772	322	U	U
635	ML5238	8	19	500	190	S1	P

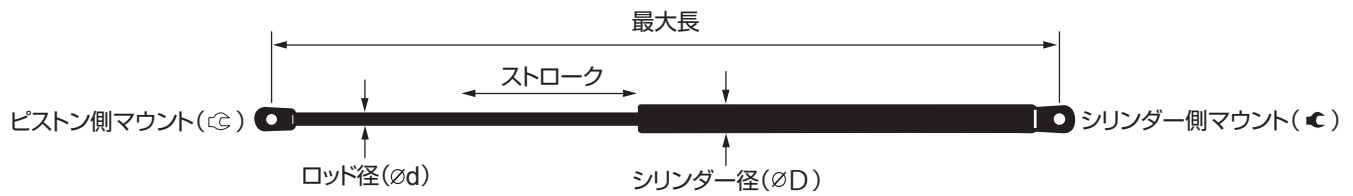MAXLIFT スペック表【反発力別】



反発力	MONROE	φ d	φ D	最大長	ストローク	シリンダー側マウント(●)	ピストン側マウント(⊕)
640	ML5543	8	19	695	272	U	U
640	ML5688	8	19	288	104	S1	S1
640	ML5773	8	19	475	195	U	U
650	ML5223	10	22	298	95	U	U
650	ML5746	8	19	475	184	U	P
650	ML5800	8	19	333	117	U	U
655	ML5224	10	22	465	140	U	U
690	ML5512	10	22	480	173	U	U
700	ML5336	10	22	333	100	S1	S1
700	ML5415	10	22	455	127	U	U
700	ML5675	10	22	175	45	U	U
700	ML5745	10	22	298	80	U	U
700	ML5811	8	19	323	103	U	U
710	ML5751	10	22	300	70	T1	T1
720	ML5769	10	22	285	100	U	S1
725	ML5806	10	22	560	178	U	P
730	ML5744	10	22	298	80	U	U
740	ML5510	10	22	483	175	U	U
750	ML5591	10	22	545	195	U	Q
755	ML5716	10	22	667	255	U	U
770	ML5743	10	22	505	170	U	P
800	ML5441	10	22	326	115	S1	S1
850	ML5559	10	22	235	52	U	S2
1100	ML5517	10	22	195	55	U	U
1200	ML5685	14	28	320	85	M	O
1400	ML5674	14	28	325	100	S1	S1
1430	ML5852	10	22	399	86	G	G
1550	ML5637	14	28	396	108	O	O
1600	ML5529	14	28	270	70	O	M
190/250	ML5180	8	19	490	190	U	U
220/250	ML5183	8	19	445	172	U	U
300/360	ML5148	8	19	600	230	U	U
490/550	ML5319	8	19	558	200	U	U

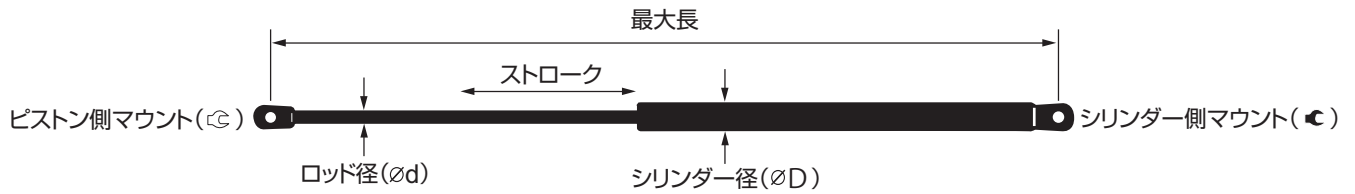
MAXLIFT スペック表 [最大長別]



最大長	MONROE	φd	φD	ストローク	反発力	㊤	㊦
175	ML5675	10	22	45	700	U	U
195	ML5517	10	22	55	1100	U	U
201	ML5791	8	19	52	250	S1	U
215	ML5389	8	19	48	200	S1	S1
235	ML5559	10	22	52	850	U	S2
241	ML5535	8	19	70	560	Y1	T1
242	ML5522	8	19	84	380	Y6	D
244	ML5643	6	15	90	400	S1	S1
254	ML5596	6	15	95	350	Y4	X1
255	ML5594	8	19	86	600	Y5	X3
255	ML5595	8	19	86	370	Y5	X3
255	ML5748	8	19	85	600	S1	U
256	ML5808	8	19	58	560	S1	S1
270	ML5481	8	19	75	420	S1	S1
270	ML5529	14	28	70	1600	O	M
278	ML5234	10	22	90	630	U	U
279	ML5135	8	19	95	490	U	U
279	ML5193	8	19	90	530	U	U
279	ML5439	8	19	95	520	U	U
280	ML5531	8	19	90	500	S1	T1
280	ML5532	8	19	90	600	S1	T1
280	ML5558	8	19	90	550	U	T1
282	ML5818	8	19	98	560	U	U
283	ML5663	8	18.5	101.5	450	U	U
285	ML5769	10	22	100	720	U	S1
286	ML5471	8	19	100	310	S1	S1
288	ML5688	8	19	104	640	S1	S1
293	ML5260	8	19	80	610	U	U
295	ML5170	8	19	80	480	U	U
297	ML5813	6	15	113	240	S1	S1
298	ML5223	10	22	95	650	U	U
298	ML5744	10	22	80	730	U	U
298	ML5745	10	22	80	700	U	U
300	ML5751	10	22	70	710	T1	T1
305	ML5640	6	15	109	130	T1	T1
310	ML5335	8	19	110	580	S1	S1
310	ML5729	8	19	110	400	U	U
313	ML5562	8	19	112	330	S1	S1
314.5	ML5804	8	19	116	330	U	U
315	ML5411	8	19	105	370	S1	U
315	ML5793	8	19	100	550	S1	S1
319	ML5263	8	19	110	580	S1	S1
319	ML5646	8	19	100	370	Y5	X3
320	ML5685	14	28	85	1200	M	O
320	ML5727	8	19	105	470	U	U

最大長	MONROE	φd	φD	ストローク	反発力	㊤	㊦
323	ML5811	8	19	103	700	U	U
325	ML5674	14	28	100	1400	S1	S1
326	ML5441	10	22	115	800	S1	S1
333	ML5336	10	22	100	700	S1	S1
333	ML5800	8	19	117	650	U	U
348	ML5442	8	19	120	620	U	U
350	ML5163	8	19	100	320	S1	S1
364	ML5489	8	19	132	310	S1	S1
365	ML5445	8	19	140	480	Y1	D
365.5	ML5680	8	19	130	440	U	U
366	ML5670	8	19	117	280	S1	S1
367	ML5421	6	15	145	320	Y1	X1
369	ML5658	8	18.5	110	320	S1	S1
370	ML5694	8	19	110	320	S1	S1
374	ML5563	8	19	140	350	S1	S1
375	ML5728	8	19	145	615	U	U
375	ML5830	8	19	140	390	U	P
396	ML5637	14	28	108	1550	O	O
399	ML5852	10	22	86	1430	G	G
400	ML5689	8	19	160	330	S1	P
404.5	ML5736	8	19	163	460	S1	U
405	ML5277	8	19	150	520	U	U
405	ML5449	8	19	160	620	U	U
405	ML5649	8	19	160	300	U	U
410	ML5422	6	15	160	280	Y1	X1
412	ML5241	8	19	155	340	U	U
412	ML5691	8	19	163	400	S1	U
415	ML5801	8	19	160	530	U	U
418	ML5802	8	19	163	490	U	U
425	ML5695	8	19	165	350	S1	U
431	ML5145	8	19	173	380	U	U
437	ML5775	8	19	173	350	S1	S1
439.5	ML5653	8	18.5	157	550	S1	U
445	ML5079	8	19	180	300	U	U
445	ML5183	8	19	172	220/250	U	U
448	ML5343	8	19	180	590	U	U
450	ML5308	8	21	170	490	U	U
450	ML5742	8	19	180	535	S1	U
450	ML5831	8	19	180	550	U	S1
451	ML5725	8	19	185	385	S1	S1
455	ML5165	8	19	164	380	U	U
455	ML5415	10	22	127	700	U	U
456	ML5655	8	18.5	165	320	S1	S1
458	ML5160	8	19	176	430	S1	S1
459.5	ML5438	8	19	180	535	S1	S1

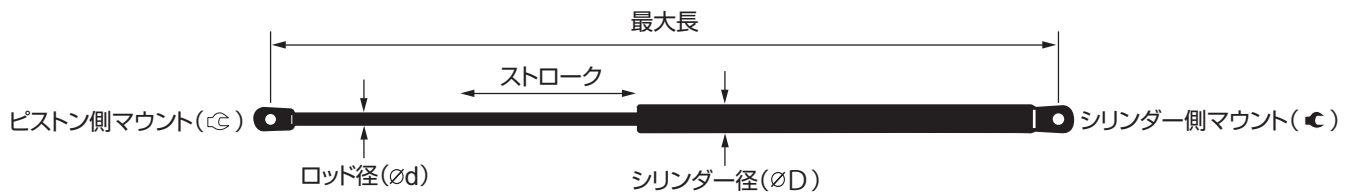
MAXLIFT スペック表【最大長別】



最大長	MONROE	∅d	∅D	ストローク	反発力	㊤	㊦
460	ML5785	8	19	170	350	S1	S1
465	ML5224	10	22	140	655	U	U
472	ML5164	8	19	180	330	U	U
475	ML5120	8	19	195	350	U	U
475	ML5719	8	19	175	510	U	P
475	ML5746	8	19	184	650	U	P
475	ML5773	8	19	195	640	U	U
480	ML5512	10	22	173	690	U	U
480	ML5703	8	19	190	420	P	U
480	ML5792	8	19	200	550	U	P
481.5	ML5416	8	19	199	530	U	U
483	ML5510	10	22	175	740	U	U
485	ML5307	8	19	189	450	U	U
485	ML5459	8	19	193	460	S1	S1
490	ML5180	8	19	190	190/250	U	U
490	ML5747	8	19	198	530	T1	T1
491	ML5425	8	19	205	600	U	U
494	ML5460	8	19	185	490	S1	S1
497	ML5717	8	19	200	430	P	U
498	ML5406	8	19	197	330	U	U
500	ML5038	8	19	200	280	U	U
500	ML5100	8	19	204	480	S1	S1
500	ML5185	8	19	205	470	S1	U
500	ML5194	8	19	200	380	S1	U
500	ML5196	8	19	200	400	S1	U
500	ML5197	8	19	205	420	S1	U
500	ML5198	8	19	193	470	S1	U
500	ML5238	8	19	190	635	S1	P
500	ML5261	8	19	200	350	S1	U
500	ML5264	8	19	200	350	S1	U
500	ML5491	8	19	200	310	S1	U
500	ML5574	8	19	200	270	U	D
500	ML5600	8	19	200	230	Y1	D
501	ML5073	8	19	207	480	Y1	X1
502	ML5101	8	19	199	280	S1	S1
502	ML5132	8	19	205	500	S1	U
502	ML5227	8	19	200	530	S1	S1
505	ML5722	10	22	205	610	U	U
505	ML5731	8	19	211	330	S1	P
505	ML5743	10	22	170	770	U	P
507	ML5377	8	19	203	520	U	S1
510	ML5103	8	19	202	620	U	U
511	ML5408	8	19	199	520	U	U
512	ML5468	8	19	200	470	S1	S1
515	ML5123	8	19	210	500	S1	S1


最大長	MONROE	∅d	∅D	ストローク	反発力	㊤	㊦
517	ML5436	8	19	190	420	S1	S1
522	ML5272	8	19	210	400	U	U
525	ML5340	8	19	210	140	U	U
525	ML5349	8	19	210	480	U	U
525	ML5350	8	19	210	240	U	U
525	ML5636	8	19	210	240	U	U
526	ML5849	8	18.5	220	325	U	U
528	ML5754	8	19	212	420	U	P
530	ML5690	8	19	175	530	S1	S1
535	ML5167	8	19	215	480	U	U
535	ML5560	8	19	200	280	U	U
536.5	ML5166	8	19	205	430	U	U
538	ML5357	8	19	190	125	U	U
540	ML5188	8	19	214	400	U	U
540	ML5213	8	19	200	450	S1	S1
545	ML5312	8	19	230	300	U	U
545	ML5591	10	22	195	750	U	Q
545	ML5692	8	19	210	450	U	U
547	ML5718	10	22	220	460	U	U
549	ML5016	8	19	229.5	240	Y1	X2
550	ML5039	8	19	229.5	380	Y1	X2
553	ML5659	8	18.5	225	220	S1	S1
558	ML5319	8	19	200	490/550	U	U
560	ML5806	10	22	178	725	U	P
565	ML5144	8	19	216	360	U	U
565	ML5412	8	19	210	560	S1	U
565	ML5730	8	19	215	315	U	U
566	ML5138	8	19	204	500	U	U
568	ML5375	8	19	230	500	U	U
568	ML5397	8	19	230	560	U	U
570	ML5400	8	19	230	420	U	U
570	ML5401	8	19	230	520	U	U
570	ML5402	8	19	240	470	U	U
570	ML5577	8	19	200	280	U	P
571	ML5346	8	19	208	570	U	U
577	ML5564	8	19	225	270	U	P
580	ML5620	8	19	205	230	U	U
581.5	ML5469	8	19	210	535	S1	S1
582	ML5673	8	19	203	460	U	U
585	ML5265	8	19	235	250	U	U
591	ML5077	8	19	240	350	U	U
600	ML5148	8	19	230	300/360	U	U
600	ML5325	8	19	244	330	U	U
602	ML5184	8	19	223	320	U	U
624	ML5432	8	19	260	400	S1	S1

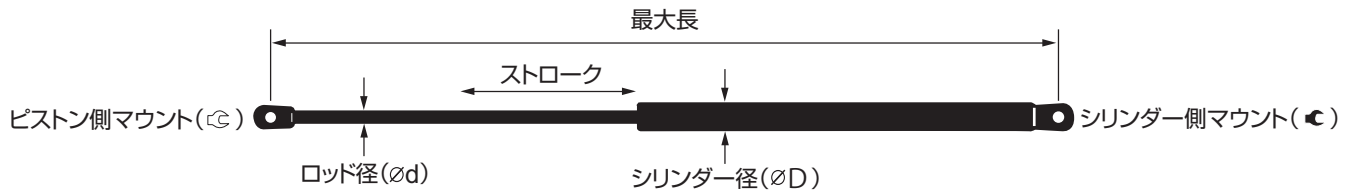MAXLIFT スペック表 [最大長別]



最大長	MONROE	Ø d	Ø D	ストローク	反発力	㊤	㊦
625	ML5693	8	19	210	590	P	S1
631	ML5851	8	18.5	265	455	S1	S1
635	ML5450	8	19	259	290	U	U
640	ML5530	8	19	260	510	U	P
648	ML5267	8	19	265	190	S1	S1
650	ML5345	8	19	270	310	U	U
650	ML5715	8	19	270	350	U	U
667	ML5716	10	22	255	755	U	U
674	ML5798	8	19	293	300	U	U
674	ML5799	8	19	293	330	U	U
675	ML5309	8	19	285	260	U	U
675	ML5521	8	19	263	360	T1	Q
675	ML5608	8	19	279	210	N	N
678	ML5393	8	19	270	270	U	U
680	ML5192	8	19	270	360	U	U
685	ML5470	8	19	265	200	S1	S1
687	ML5561	8	19	295	270	U	U
690	ML5128	10	22	280	630	S1	S1
695	ML5543	8	19	272	640	U	U
715	ML5269	8	19	306	290	U	U
715	ML5565	8	19	303	160	P	S1
720	ML5737	8	19	300	180	P	U
722	ML5266	8	19	306	280	U	U
722	ML5386	8	19	315	325	U	U
722	ML5679	8	19	306	310	L	L
728	ML5648	8	18.5	310	265	P	U
730	ML5735	8	19	320	250	P	U
730	ML5829	8	19	310	380	P	U
765	ML5638	8	19	324	200	U	U
772	ML5329	10	22	322	630	U	U
775	ML5621	10	22	322	530	U	U
788	ML5102	8	19	342	280	Y1	V
943	ML5678	10	22	417	380	U	L

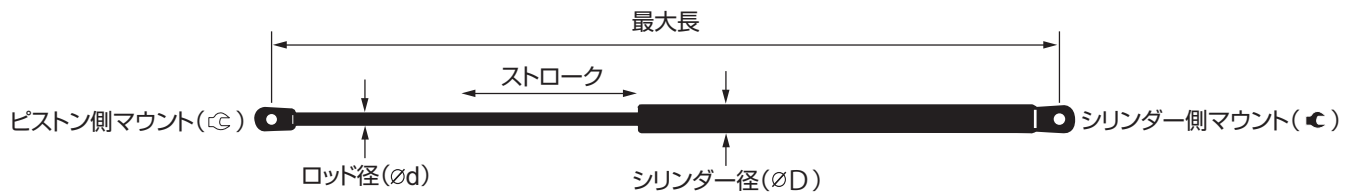
MAXLIFT スペック表【ストローク別】



ストローク	MONROE	φd	φD	最大長	反発力	㊦	㊦
45	ML5675	10	22	175	700	U	U
48	ML5389	8	19	215	200	S1	S1
52	ML5559	10	22	235	850	U	S2
52	ML5791	8	19	201	250	S1	U
55	ML5517	10	22	195	1100	U	U
58	ML5808	8	19	256	560	S1	S1
70	ML5529	14	28	270	1600	O	M
70	ML5535	8	19	241	560	Y1	T1
70	ML5751	10	22	300	710	T1	T1
75	ML5481	8	19	270	420	S1	S1
80	ML5170	8	19	295	480	U	U
80	ML5260	8	19	293	610	U	U
80	ML5744	10	22	298	730	U	U
80	ML5745	10	22	298	700	U	U
84	ML5522	8	19	242	380	Y6	D
85	ML5685	14	28	320	1200	M	O
85	ML5748	8	19	255	600	S1	U
86	ML5594	8	19	255	600	Y5	X3
86	ML5595	8	19	255	370	Y5	X3
86	ML5852	10	22	399	1430	G	G
90	ML5193	8	19	279	530	U	U
90	ML5234	10	22	278	630	U	U
90	ML5531	8	19	280	500	S1	T1
90	ML5532	8	19	280	600	S1	T1
90	ML5558	8	19	280	550	U	T1
90	ML5643	6	15	244	400	S1	S1
95	ML5135	8	19	279	490	U	U
95	ML5223	10	22	298	650	U	U
95	ML5439	8	19	279	520	U	U
95	ML5596	6	15	254	350	Y4	X1
98	ML5818	8	19	282	560	U	U
100	ML5163	8	19	350	320	S1	S1
100	ML5336	10	22	333	700	S1	S1
100	ML5471	8	19	286	310	S1	S1
100	ML5646	8	19	319	370	Y5	X3
100	ML5674	14	28	325	1400	S1	S1
100	ML5769	10	22	285	720	U	S1
100	ML5793	8	19	315	550	S1	S1
101.5	ML5663	8	18.5	283	450	U	U
103	ML5811	8	19	323	700	U	U
104	ML5688	8	19	288	640	S1	S1
105	ML5411	8	19	315	370	S1	U
105	ML5727	8	19	320	470	U	U
108	ML5637	14	28	396	1550	O	O
109	ML5640	6	15	305	130	T1	T1

ストローク	MONROE	φd	φD	最大長	反発力	㊦	㊦
110	ML5263	8	19	319	580	S1	S1
110	ML5335	8	19	310	580	S1	S1
110	ML5658	8	18.5	369	320	S1	S1
110	ML5694	8	19	370	320	S1	S1
110	ML5729	8	19	310	400	U	U
112	ML5562	8	19	313	330	S1	S1
113	ML5813	6	15	297	240	S1	S1
115	ML5441	10	22	326	800	S1	S1
116	ML5804	8	19	314.5	330	U	U
117	ML5670	8	19	366	280	S1	S1
117	ML5800	8	19	333	650	U	U
120	ML5442	8	19	348	620	U	U
127	ML5415	10	22	455	700	U	U
130	ML5680	8	19	365.5	440	U	U
132	ML5489	8	19	364	310	S1	S1
140	ML5224	10	22	465	655	U	U
140	ML5445	8	19	365	480	Y1	D
140	ML5563	8	19	374	350	S1	S1
140	ML5830	8	19	375	390	U	P
145	ML5421	6	15	367	320	Y1	X1
145	ML5728	8	19	375	615	U	U
150	ML5277	8	19	405	520	U	U
155	ML5241	8	19	412	340	U	U
157	ML5653	8	18.5	439.5	550	S1	U
160	ML5422	6	15	410	280	Y1	X1
160	ML5449	8	19	405	620	U	U
160	ML5649	8	19	405	300	U	U
160	ML5689	8	19	400	330	S1	P
160	ML5801	8	19	415	530	U	U
163	ML5691	8	19	412	400	S1	U
163	ML5736	8	19	404.5	460	S1	U
163	ML5802	8	19	418	490	U	U
164	ML5165	8	19	455	380	U	U
165	ML5655	8	18.5	456	320	S1	S1
165	ML5695	8	19	425	350	S1	U
170	ML5308	8	21	450	490	U	U
170	ML5743	10	22	505	770	U	P
170	ML5785	8	19	460	350	S1	S1
172	ML5183	8	19	445	220/250	U	U
173	ML5145	8	19	431	380	U	U
173	ML5512	10	22	480	690	U	U
173	ML5775	8	19	437	350	S1	S1
175	ML5510	10	22	483	740	U	U
175	ML5690	8	19	530	530	S1	S1
175	ML5719	8	19	475	510	U	P

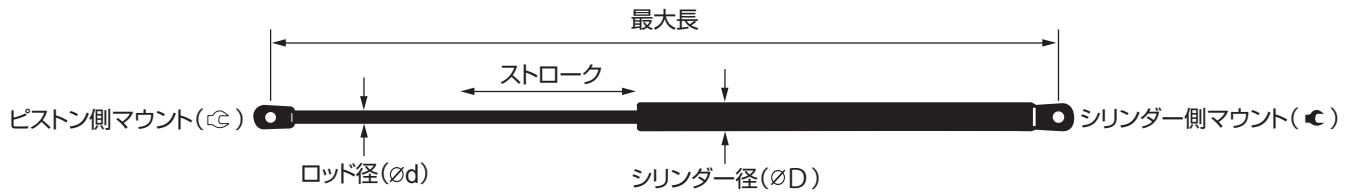
MAXLIFT スペック表 [ストローク別]



ストローク	MONROE	φd	φD	最大長	反発力	㊦	㊦
176	ML5160	8	19	458	430	S1	S1
178	ML5806	10	22	560	725	U	P
180	ML5079	8	19	445	300	U	U
180	ML5164	8	19	472	330	U	U
180	ML5343	8	19	448	590	U	U
180	ML5438	8	19	459.5	535	S1	S1
180	ML5742	8	19	450	535	S1	U
180	ML5831	8	19	450	550	U	S1
184	ML5746	8	19	475	650	U	P
185	ML5460	8	19	494	490	S1	S1
185	ML5725	8	19	451	385	S1	S1
189	ML5307	8	19	485	450	U	U
190	ML5180	8	19	490	190/250	U	U
190	ML5238	8	19	500	635	S1	P
190	ML5357	8	19	538	125	U	U
190	ML5436	8	19	517	420	S1	S1
190	ML5703	8	19	480	420	P	U
193	ML5198	8	19	500	470	S1	U
193	ML5459	8	19	485	460	S1	S1
195	ML5120	8	19	475	350	U	U
195	ML5591	10	22	545	750	U	Q
195	ML5773	8	19	475	640	U	U
197	ML5406	8	19	498	330	U	U
198	ML5747	8	19	490	530	T1	T1
199	ML5101	8	19	502	280	S1	S1
199	ML5408	8	19	511	520	U	U
199	ML5416	8	19	481.5	530	U	U
200	ML5038	8	19	500	280	U	U
200	ML5194	8	19	500	380	S1	U
200	ML5196	8	19	500	400	S1	U
200	ML5213	8	19	540	450	S1	S1
200	ML5227	8	19	502	530	S1	S1
200	ML5261	8	19	500	350	S1	U
200	ML5264	8	19	500	350	S1	U
200	ML5319	8	19	558	490/550	U	U
200	ML5468	8	19	512	470	S1	S1
200	ML5491	8	19	500	310	S1	U
200	ML5560	8	19	535	280	U	U
200	ML5574	8	19	500	270	U	D
200	ML5577	8	19	570	280	U	P
200	ML5600	8	19	500	230	Y1	D
200	ML5717	8	19	497	430	P	U
200	ML5792	8	19	480	550	U	P
202	ML5103	8	19	510	620	U	U
203	ML5377	8	19	507	520	U	S1












ストローク	MONROE	φd	φD	最大長	反発力	㊦	㊦
203	ML5673	8	19	582	460	U	U
204	ML5100	8	19	500	480	S1	S1
204	ML5138	8	19	566	500	U	U
205	ML5132	8	19	502	500	S1	U
205	ML5166	8	19	536.5	430	U	U
205	ML5185	8	19	500	470	S1	U
205	ML5197	8	19	500	420	S1	U
205	ML5425	8	19	491	600	U	U
205	ML5620	8	19	580	230	U	U
205	ML5722	10	22	505	610	U	U
207	ML5073	8	19	501	480	Y1	X1
208	ML5346	8	19	571	570	U	U
210	ML5123	8	19	515	500	S1	S1
210	ML5272	8	19	522	400	U	U
210	ML5340	8	19	525	140	U	U
210	ML5349	8	19	525	480	U	U
210	ML5350	8	19	525	240	U	U
210	ML5412	8	19	565	560	S1	U
210	ML5469	8	19	581.5	535	S1	S1
210	ML5636	8	19	525	240	U	U
210	ML5692	8	19	545	450	U	U
210	ML5693	8	19	625	590	P	S1
211	ML5731	8	19	505	330	S1	P
212	ML5754	8	19	528	420	U	P
214	ML5188	8	19	540	400	U	U
215	ML5167	8	19	535	480	U	U
215	ML5730	8	19	565	315	U	U
216	ML5144	8	19	565	360	U	U
220	ML5718	10	22	547	460	U	U
220	ML5849	8	18.5	526	325	U	U
223	ML5184	8	19	602	320	U	U
225	ML5564	8	19	577	270	U	P
225	ML5659	8	18.5	553	220	S1	S1
229.5	ML5016	8	19	549	240	Y1	X2
229.5	ML5039	8	19	550	380	Y1	X2
230	ML5148	8	19	600	300/360	U	U
230	ML5312	8	19	545	300	U	U
230	ML5375	8	19	568	500	U	U
230	ML5397	8	19	568	560	U	U
230	ML5400	8	19	570	420	U	U
230	ML5401	8	19	570	520	U	U
235	ML5265	8	19	585	250	U	U
240	ML5077	8	19	591	350	U	U
240	ML5402	8	19	570	470	U	U
244	ML5325	8	19	600	330	U	U

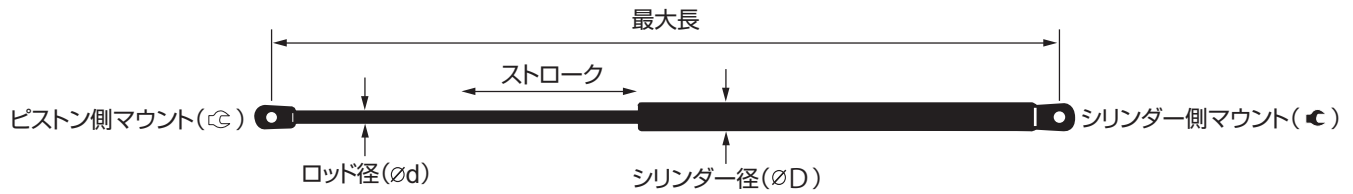MAXLIFT スペック表【ストローク別】














ストローク	MONROE	ø d	ø D	最大長	反発力	㊤	㊦
255	ML5716	10	22	667	755	U	U
259	ML5450	8	19	635	290	U	U
260	ML5432	8	19	624	400	S1	S1
260	ML5530	8	19	640	510	U	P
263	ML5521	8	19	675	390	T1	Q
265	ML5267	8	19	648	190	S1	S1
265	ML5470	8	19	685	200	S1	S1
265	ML5851	8	18.5	631	455	S1	S1
270	ML5192	8	19	680	360	U	U
270	ML5345	8	19	650	310	U	U
270	ML5393	8	19	678	270	U	U
270	ML5715	8	19	650	350	U	U
272	ML5543	8	19	695	640	U	U
279	ML5608	8	19	675	210	N	N
280	ML5128	10	22	690	630	S1	S1
285	ML5309	8	19	675	260	U	U
293	ML5798	8	19	674	300	U	U
293	ML5799	8	19	674	330	U	U
295	ML5561	8	19	687	270	U	U
300	ML5737	8	19	720	180	P	U
303	ML5565	8	19	715	160	P	S1
306	ML5266	8	19	722	280	U	U
306	ML5269	8	19	715	290	U	U
306	ML5679	8	19	722	310	L	L
310	ML5648	8	18.5	728	265	P	U
310	ML5829	8	19	730	380	P	U
315	ML5386	8	19	722	325	U	U
320	ML5735	8	19	730	250	P	U
322	ML5329	10	22	772	630	U	U
322	ML5621	10	22	775	530	U	U
324	ML5638	8	19	765	200	U	U
342	ML5102	8	19	788	280	Y1	V
417	ML5678	10	22	943	380	U	L

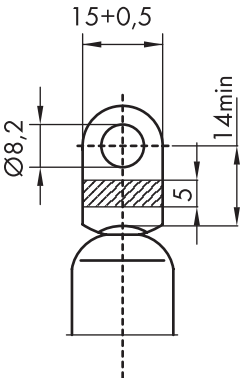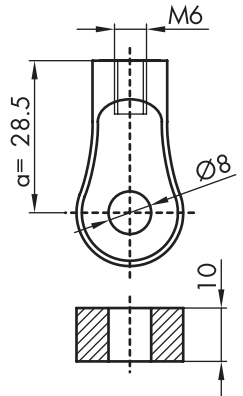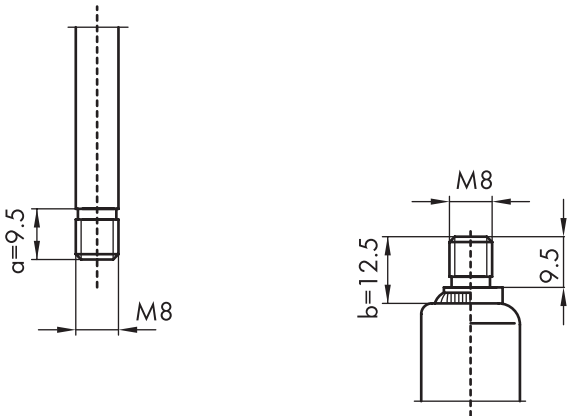MAXLIFT マウント形状表

D 	H 	I 	L 
M 	N 	O 	P 
Q 	S1 	S2 	

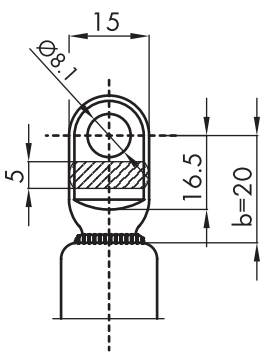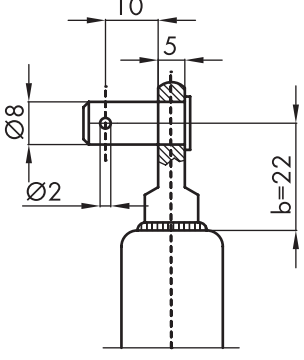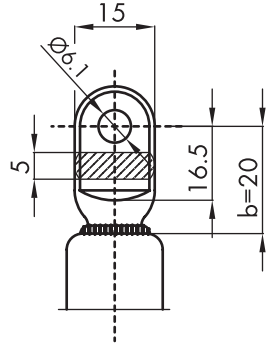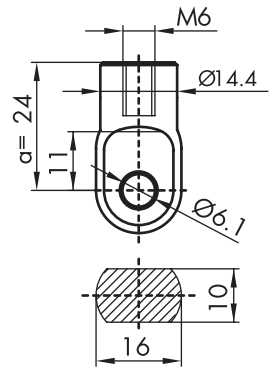MAXLIFT マウント形状表

T1 	U 	V 	X1 
X2 	X3 	Y1 ロッド Ø10 	Y1 ロッド Ø13 
Y1 ロッド Ø11 	Y4 	Y5 	Y6 